

# BLAULITE HRV 17 EC

Heat recovery ventilators with EC motor for commercial applications

## Casing

- Steel casing is covered with high quality multilayer aluminium and zinc alloy to prevent corrosion. The casing is equipped with a switch to turn the ventilator off when the service panel is opened. Service access from both left and right side. For outdoor installation the roof is necessary (optional).



## Heat recovery core

- Unique plate heat exchanger is made of polystyrene and designed for high-efficient heat recovery. The stainless steel drain pan is located on the inlet and outlet sides.

## Fans

- The unit is equipped with supply and exhaust centrifugal fans featuring backward-curved blades and advanced EC (Electronically Commutated) motor technology. These fans deliver superior energy efficiency and precise speed control. They come with built-in thermal overheating protection and an automatic restart function, ensuring consistent and reliable performance. Additionally, both the electric motors and impellers are dynamically balanced to minimise noise and vibration, providing smooth and efficient

## Defrost system

- Fan stop defrost system is activated when the outdoor temperature falls below 23 °F (-5 °C).

## Filter

- Washable MERV 6 air filters in exhaust and supply air streams.
- Filters MERV 8, MERV 13 optional.

## HRV 17 EC

Filter type	Additional Air Pressure Drop with optional filters		
	Air flow [CFM]		
	300	600	900
MERV 8	0.03	0.06	0.08
MERV 13	0.2	0.40	0.53


## Control

- The unit incorporates an integrated automation and control system with following functions:
  - Operation mode switch.
  - Air flow balancing by supply and exhaust fan independent speed adjustment.
  - Automatic recovery core frost protection.
  - External control device connection.

MODEL	QUANTITY	COMMENTS	PROJECT
			location:
			architect:
			engineer:
			contractor:
			submitted by:

## Overall dimensions [in]


Model	A	A2	H	H2	H3	L
Blaulite HRV 17 EC	37 ¼	20	26	8	4	36 ½

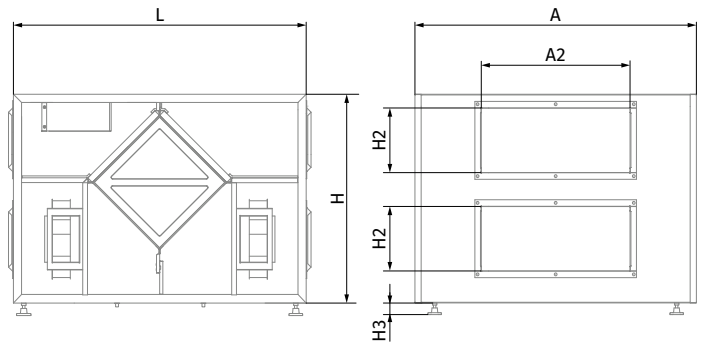

Technical data

Parameters	Blaulite HRV 17 EC
Voltage [V / 60 Hz]	1 ~ 208
Unit power [W]	940
Unit current [A]	10.5
Minimum circuit Amps [MCA]	13.2
Maximum over current protection [MOP]	13.8
Sensible effectiveness @ max air flow [%]	53
Air flow @ ESP 0.4" WG [CFM]	1220
Air flow max [CFM]	1360
Transported air temperature [F]	-35 ... +140
Outer skin casing material	21 gauge galvanized steel
Insulation	1" mineral wool
Connected air duct size [in]	8x20
Net [lb]	209
Gross [lb]	364

BLAULITE HRV 17 EC

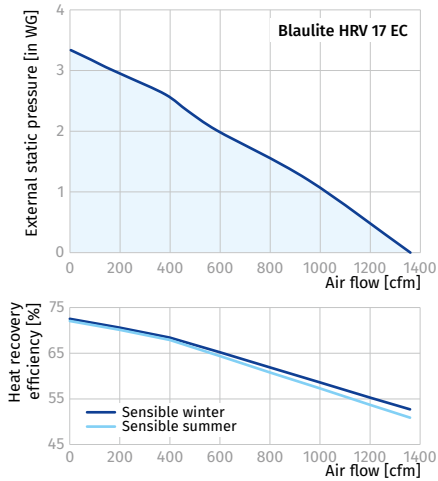

Note: Efficiencies are based on AHRI standard conditions

Air flow	Fresh air to building port	Exhaust air from building port
1220 CFM at 0.4 in. w.g.	76	76
490 CFM at 0.2 in. w.g.	59	59

	Summer mode			Winter mode		
	Outdoor Air	Return Air	Supply Air	Outdoor Air	Return Air	Supply Air
Standard Flow Rate [CFM]	1220	1220	1220	1220	1220	1220
Dry Bulb [°F]	95	75	82.8	35	70	57
Wet Bulb [°F]	78	63	75	33	58	44.9
Enthalpy (H) [BTU/lb]	41.5	28.6	38.7	12.2	25.1	17.6
Moisture Ratio (MR) [gr/lb]	117.3	66.7	118.4	24.4	52.6	24.7