

# Centro EC

## Inline centrifugal fans

### Use

- Supply and exhaust ventilation and air conditioning systems of various premises requiring cost-saving controllable ventilation.
- The best ventilation solution for exhaust ventilation of bathrooms, kitchens and other humid premises.
- Compatible with Ø 4" up to 12" round air ducts.



**Air flow:**  
up to 817 CFM



**Power:**  
from 29.5 W



**Noise level:**  
from 3 Sones



### Design

- Durable, impact-resistant and corrosion-free ABS-plastic casing.
- Aerodynamically shaped casing.
- Airtight terminal box for connection to power mains.

### Motor

- High-efficient electronically commutated direct current motors with backward curved blades. Such motors are the most state-of-the-art energy saving solution. Power consumption of EC motors is 35 % less as compared to standard motors. The fans with EC motors have excellent aerodynamic performance and low-noise operation.
- EC motors are featured with high performance and total speed controllable range.
- High efficiency reaching 90 % is the premium advantage of the electronically commutated motors. The motors are equipped with ball bearings designed for at least 40 000 operating hours.

### Speed control

- The fan is operated with an 0-10 V control signal.
- The air capacity is controlled depending on air temperature, pressure level, smoke content, etc.
- The speed of the EC motor can be changed proportionally to fluctuations of the control parameter and the fan delivers a required air volume to the ventilation system. Maximum fan speed does not depend on the current frequency.
- The fans may be integrated into a building management systems. The specially designed software provides precise control of all the fans integrated into the system.

### Mounting

- The fans are designed for duct mounting in any point of the ventilation system with the casing mounted at any angle. In case of vertical mounting a protective outer hood must be installed on the top.
- Fixation to the floor, wall or ceiling is performed with the supplied mounting brackets.
- Electric connection and installation must be performed in compliance with the manual and the wiring diagram on the terminal box.



Mounting bracket for easy installation supplied with the fan

### Options

- FR:** built-in smooth speed controller from 0 to 100 %. The fan is supplied with a pre-wired power cable with IEC plug as a standard.

#### Designation key


Series	Motor	Spigot diameter [mm]	Options
Centro	EC: electronically commutated motor	100; 125; 150; 200; 250; 315	FR: built-in smooth speed controller adjustable from 0 to 100 %. The fan is supplied with a pre-wired cable with IEC plug as a standard.

#### Accessories

Silencers	Filter boxes	Electric heaters	Water heaters	Backdraft air dampers	Air dampers	Speed controllers
SD	KFBK	KFBT	EKH	WKH	VRV	VK / VKA
						CDT E/0-10

**Dimensions [in]**

Model	Duct dia	Ø D	Ø D1	B	L	L1	L2	L3	Weight [lb]
Centro EC 100	4"	3 15/16"	9 13/16"	10 5/8"	9 1/16"	1 3/16"	1 1/16"	1 3/16"	4.7
Centro EC 125	5"	4 15/16"	9 13/16"	10 5/8"	8 11/16"	1 3/16"	1 1/16"	1 3/16"	4.9
Centro EC 150	6"	5 7/8"	11 13/16"	12 3/16"	11 1/4"	1 3/16"	1 3/16"	1 3/16"	5.7
Centro EC 200	8"	7 7/8"	13 3/8"	13 15/16"	10 7/8"	1 3/16"	1 3/16"	1 9/16"	8.8
Centro EC 250	10"	9 13/16"	13 3/8"	13 15/16"	10 7/16"	1 3/16"	1 3/16"	1 9/16"	9.9
Centro EC 315	12"	12 3/8"	15 3/4"	16 5/16"	16 5/16"	1 9/16"	2 3/16"	1 9/16"	11.2

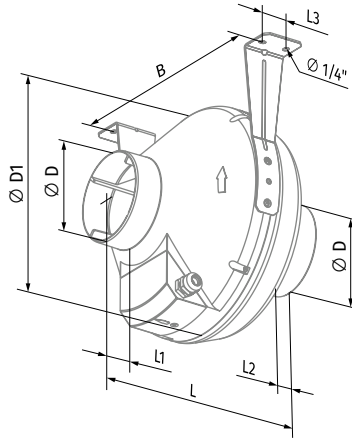


### Technical data


Model	Duct dia	Energy Star compliance	RPM*	Sones @ 1 ft	Watts*	Amps*	10 V curve CFM vs. Static Pressure (Ps) in WG											Max Ps, in WG	Volts
							0"	0.125"	0.2"	0.25"	0.375"	0.5"	0.75"	1"	1.25"	1.5"	2.5"		
Centro EC 100	4"	yes	2436	3	29.5	0.53	131	120	115	111	100	90	71	56	38	25	-	2.07	120
Centro EC 125	5"	yes	2675	3.4	41	0.63	190	173	163	158	142	130	105	82	63	45	-	2.2	120
Centro EC 150	6"	yes	3252	3.8	76	1.08	333	317	305	300	280	263	229	198	159	108	17	2.7	120
Centro EC 200	8"	yes	3000	3.9	99	1.45	471	447	423	418	392	366	312	248	191	142	-	2.24	120

\* The parameters RPM, Watts, Amps are indicated at 0.2 in WG static pressure


#### CENTRO EC 100

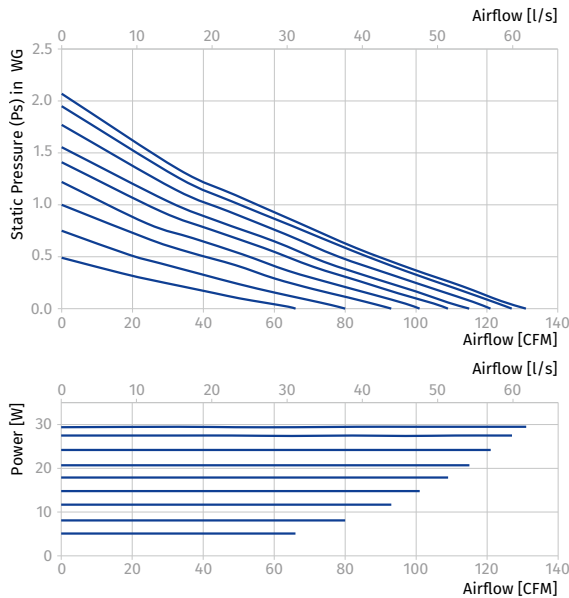


#### CENTRO EC 125

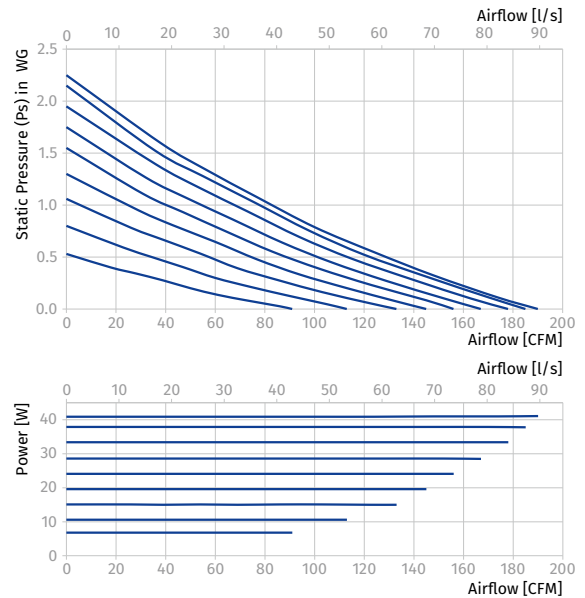

#### CENTRO EC 150

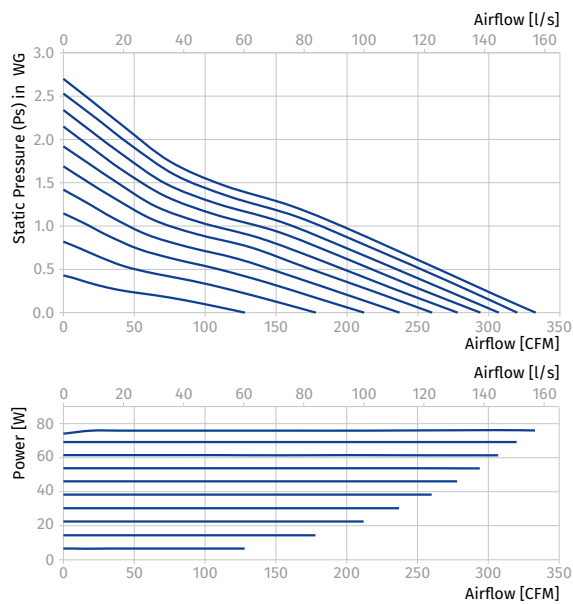


#### CENTRO EC 200

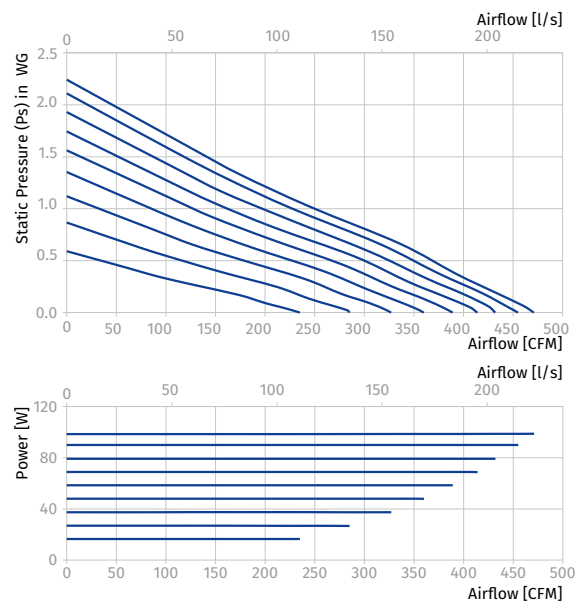

Model	Duct dia	Energy Star compliance	RPM*	Sones @ 1 ft	Watts*	Amps*	10 V curve CFM vs. Static Pressure (Ps) in WG											Max Ps, in WG	Volts
							0"	0.125"	0.2"	0.25"	0.375"	0.5"	0.75"	1"	1.25"	1.5"	2.5"		
Centro EC 250	10"	yes	2380	4.0	131	1.87	675	652	630	624	584	538	440	359	322	240	68	2.8	120
Centro EC 315	12"	yes	2680	4.2	170	2.37	817	794	774	768	731	693	611	516	464	303	69	3	120

\* The parameters RPM, Watts, Amps are indicated at 0.2 in WG static pressure

**CENTRO EC 250**

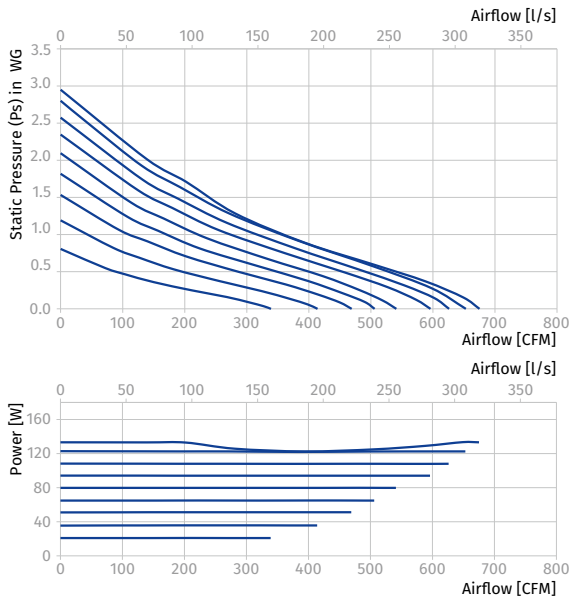

**CENTRO EC 315**

