

ERV DR 150

Energy Recovery Ventilator

ERV DR 150 is a complete whole house ventilation system designed to bring a continuous supply of fresh air into the house while exhausting an equal amount of stale air.
Five year warranty.



Casing

- Steel casing is covered with high-quality multilayer aluminum and zinc alloy to prevent corrosion.
- The casing is equipped with a switch to turn the ventilator off when the service panel is opened.

Filter

- Washable MERV 6 air filters in exhaust and supply air streams.
- Optional supply: anti grease aluminum filter.

Fans

- The unit is equipped with supply and exhaust centrifugal fans with backward curved blades and built-in thermal overheating protection with automatic restart. The electric motors and impellers are dynamically balanced.

Energy Recovery Core

- Enthalpic core provides both heat&humidity recovery. For enthalpic core no drain required.



Defrost System

- Recirculation or only exhaust defrost modes are available.

Suitable for

- Bathroom / kitchen / apartments / cottages / small offices.


Constant Flow

- ERV DR 150 CF** has an automatic constant air flow control function to keep the air flow in supply and exhaust air ducts constant even in case of variable air resistance.
- This function is provided with the integrated air flow control units. The electronic sensors convert the actual air flow to the analogue signal that is proportional to the air flow in the air duct. These signals are transmitted to the controller that controls the rotation speed of a respective fan in such a way that the actual rotations speed is equal to the set value.

Manual Balancing

- Manual balancing is a standard balancing system. Fan speed manually adjusted by operating on units controller (built-in control board with independent fan speed adjustment 0 %-100 %).


Control Board

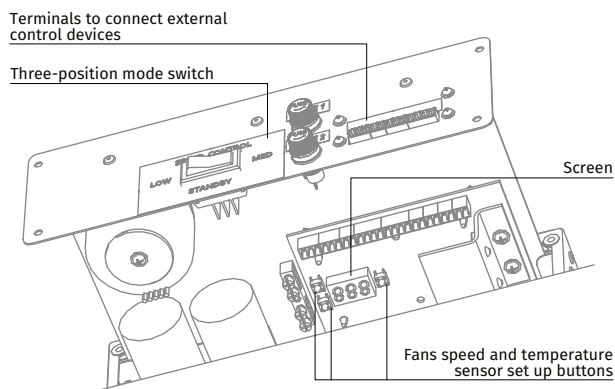

- The unit incorporates an integrated control system with following functions:
 - Operation mode switch.
 - Air flow balancing enabled by supply and exhaust fan independent speed adjustment from 0 to 100 % (percentage is displayed on built-in screen).
 - Automatic recovery core frost protection.
 - External control device connection (up to 5 at the same time).

MODEL	QUANTITY	COMMENTS	PROJECT
			location:
			architect:
			engineer:
			contractor:
			submitted by:


Dimensions

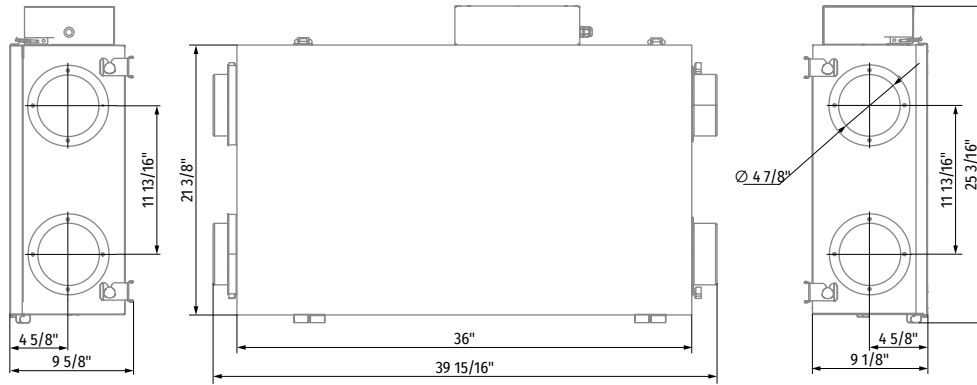

Technical Data

External Static Pressure		Net Supply Air Flow		Gross Air Flow				Power
Pa	in WG	l/s	CFM	Supply		Exhaust		Watts
				l/s	CFM	l/s	CFM	
25	0.1	84	178	85	180	83	176	189
50	0.2	79	167	80	170	79	167	189
75	0.3	75	159	76	161	74	157	186
100	0.4	71	150	72	153	69	146	185
125	0.5	67	142	67	142	64	136	183
150	0.6	62	131	63	133	60	127	181
175	0.7	58	123	58	123	55	117	179
200	0.8	53	112	53	112	50	106	176
225	0.9	48	102	49	104	46	97	174
250	1	43	91	43	91	41	87	171

Note: fan curve performed on high speed

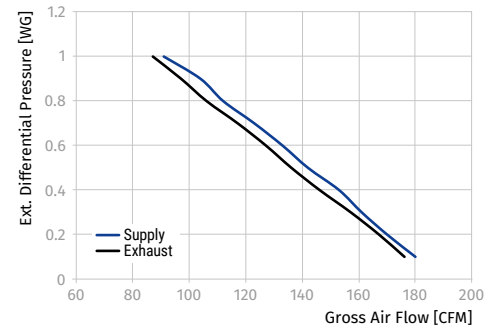

Energy Performance

Temp Mode	Supply Temp [°C]	Supply Temp [°F]	Net Air Flow [l/s]	Net Air Flow [CFM]	Watts	SRE	ASRE	Latent Recovery / Moisture Transfer	TRE	ATRE
Heating	0	32	31	66	102	66	76	0.50		
	0	32	46	97	130	63	72	0.50		
	0	32	50	106	138	63	71	0.41		
Cooling	35	95	31	66	100			0.34	39	44
	35	95	46	97	132			0.31	35	40

Model	Volts	Max. Watts	Max. Amps
ERV DR 150	120 V, 60 Hz	189	1.6

