


BlauAIR RP 2500

Ceiling mounted heat recovery units

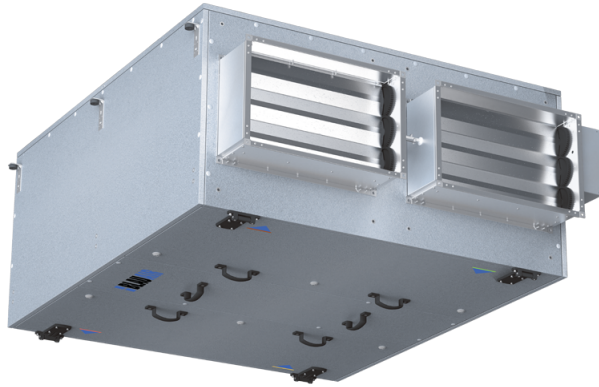

- Sound pressure level LpA at 3 m: 39
- Heat exchanger type: Rotary
- Sound insulation
- Motor type: EC
- Casing material: Aluzinc steel

| | Unit of measurement | BlauAIR RP 2500 |
|--|---------------------|-----------------|
| Phases | - | 1 |
| Minimum supply voltage | V | 200 |
| Maximum supply voltage | V | 277 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 2x740 |
| Maximum airflow | m ³ /h | |
| Sound pressure level LpA at 3 m | dB(A) | 39 |
| Heat exchanger type | - | Rotary |
| Heat exchanger material | - | Aluminum |
| Weight | kg | 0 |
| Transported air temperature (max) | °C | 122 |
| Transported air temperature (min) | °C | -31 |
| Ambient air temperature min | °C | 0 |
| Ambient air temperature max | °C | 0 |
| Ingress protection rating | - | IP34 |
| Ingress protection rating of the drive | - | IP54 |

Dimensions

| L | W | W1 | H | H1 |
|-----|-----|-----|-----|-----|
| 55" | 51" | 20" | 24" | 11" |

