Blaulite HRV 8 EC

Heat Recovery Ventilators for Light-Commercial Applications featuring Advanced EC Motor Technology

- Heat exchanger type: Cross flow
- Recovery Type: Heat
- Heat exchanger material: Polystyrene
- Filter: MERV8 (Standard)|MERV13 (Optional)
- Installation: Outdoor, Indoor
- Sound-insulated casing
- Casing material: Galvanized Steel G21
- Humidity sensor
- CO2 sensor
- Temperature sensor

	Unit of measurement	Blaulite HRV 8 EC
Connected air duct size	in	8×14”
Phases	-	1
Minimum supply voltage	V	208
Maximum supply voltage	V	208
Power supply frequency	Hz	60
Rated power	W	480
Maximum unit current	A	3.2
Maximum airflow	CFM	680
Heat recovery efficiency, max	%	58
Heat exchanger type	-	Cross flow
Heat exchanger material	-	Polystyrene
Weight	lb	148
Filter	-	MERV8 (Standard)|MERV13 (Optional)
Transported air temperature (min)	°F	5
Transported air temperature (max)	°F	90

Dimensions

A	A2	H	H2	H3	L
25 ½	14	26	8	4	36 ½

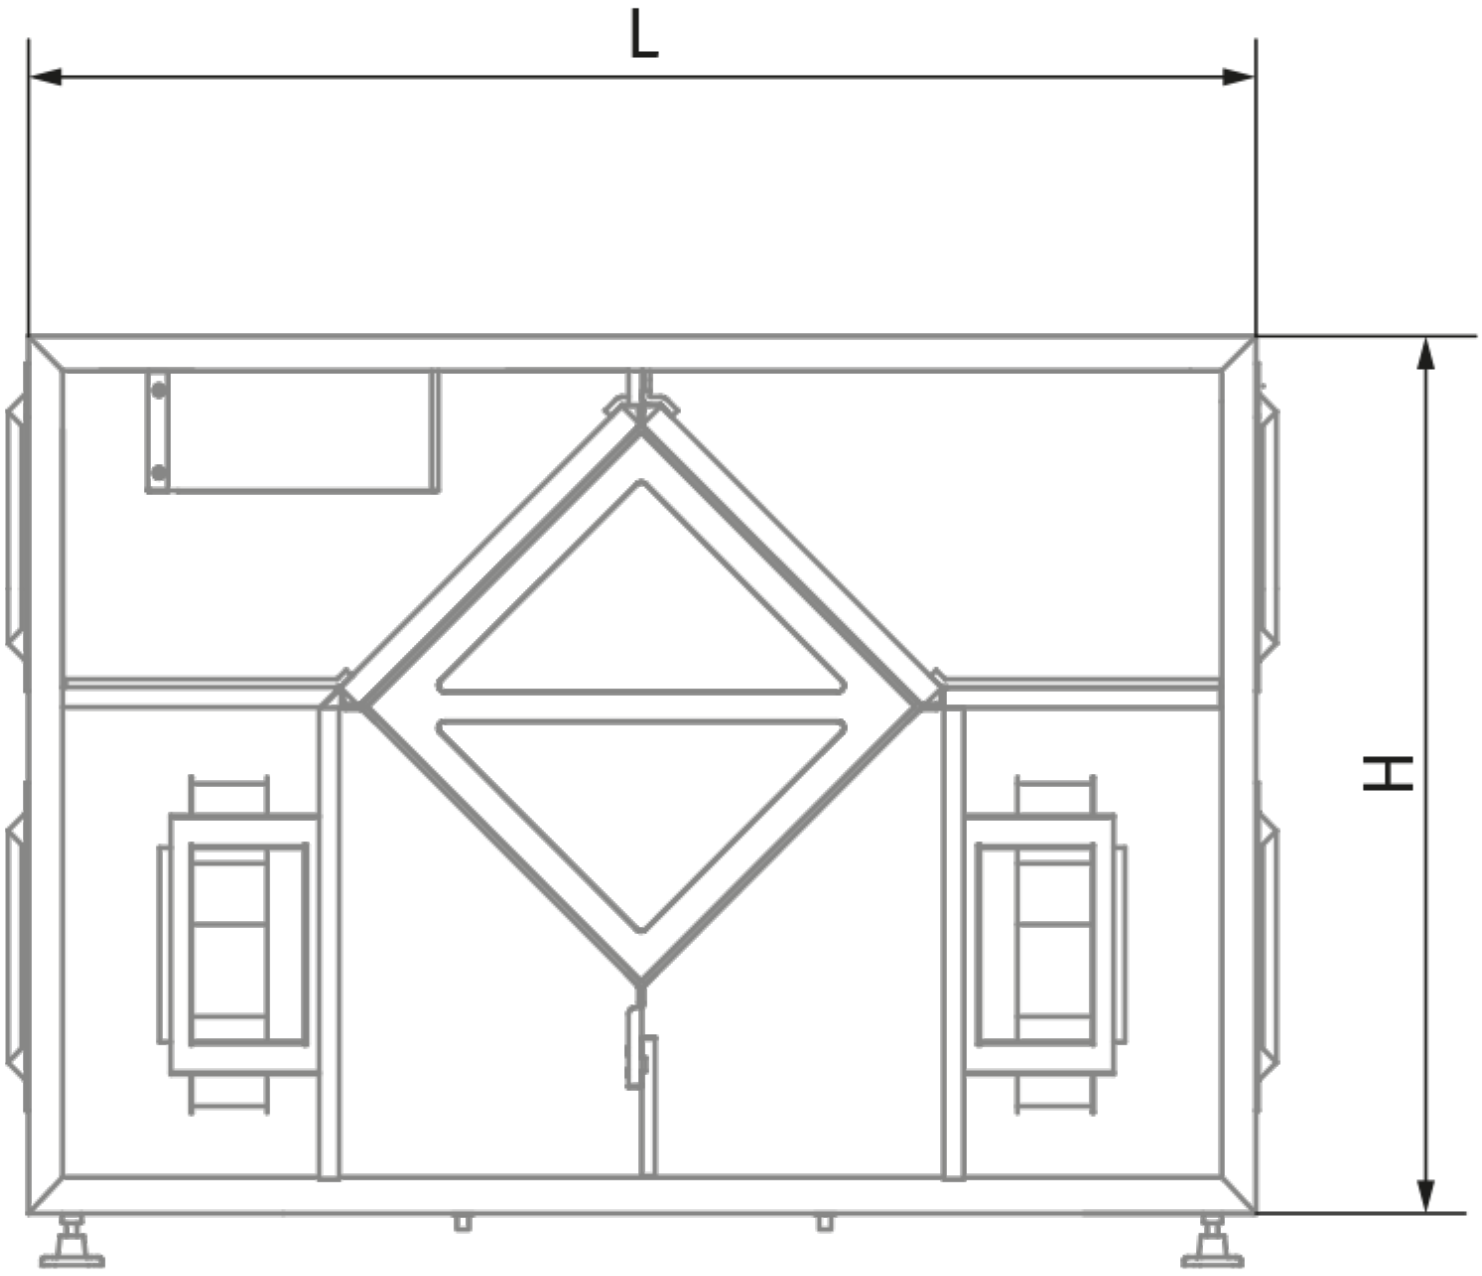

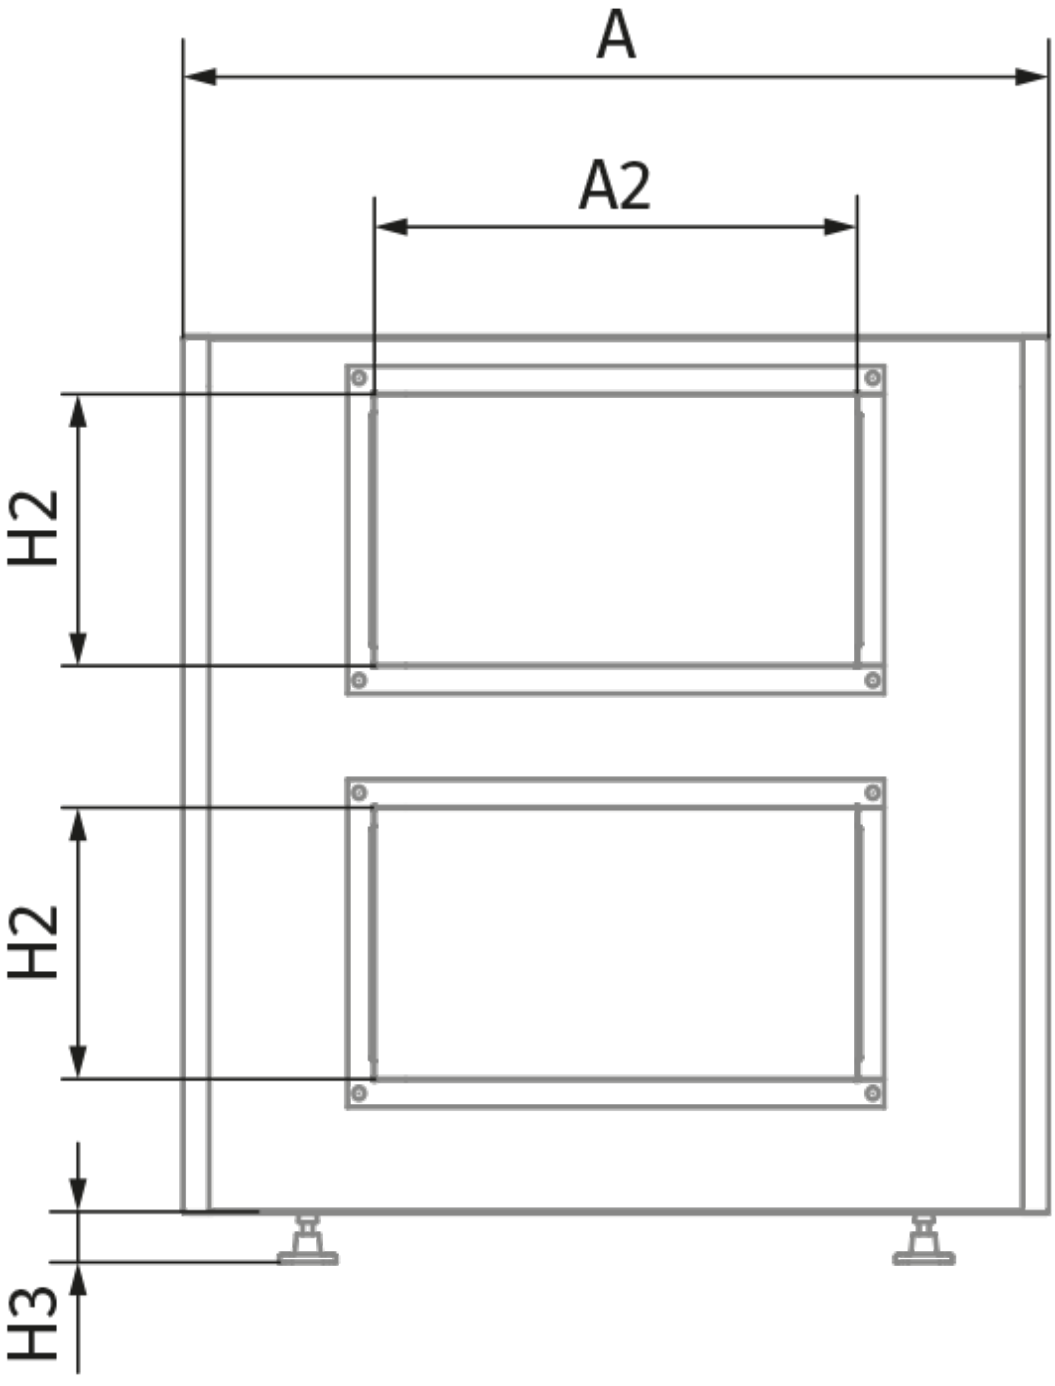
A
A2
H2
H2
H3